

# BRICK 60 NEW



MULTIFACETED CLINKER  
DETAILS – STRONG  
PROPORTIONS.



8149/650  
Gepactl Surround 20 5261 FOSM garden slab. Catalogue available separately or at [www.gepactl.de](http://www.gepactl.de)

### **IMPOSING CLINKER CONTOURING IN AN IMPRESSIVE EXTRA LONG FORMAT.**

Brick 60 is the result of cutting-edge high-tech clinker engineering - extruded in impressive 60 cm length full-body. The innovative surface contouring has an old-style authentic appearance, but with modern accents. In an expressive coal-fired look. Or gently rough water-struck. Brick 60 defines a new dimension of clinker brick slips. In terms of format. And appearance: extra long. Impressive. State of the Art.


BRICK 60 <sup>NEW</sup>

**EXTRA LONG.  
IMPRESSIVE.  
STATE OF THE ART.**

FIRINGS AND FORMATS



**650 eisenschwarz**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



bar shape



**652 moorbraun**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



bar shape



**670 sandweiß**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>




bar shape

## PRODUCT DETAILS

### BRICK 60

DIN EN 14411




format no.	8149	8141	8143
description	clinker brick slips	corner <sup>1)</sup>	lintel angle
nominal size (cm)	Riegel	DF	DF
production size (mm)	590 x 52 x 12	240 x 50 x 52 x 12	240 x 52 x 50 x 12
650 eisenschwarz 652 moorbraun 670 sandweiß	★ PG 49 ●	★ PG 757 ●	★ PG 794 ○
		★ PG 752 ●	★ PG 777 ○
pieces per bundle	25	22	18
pieces per m <sup>2</sup> /m incl. joint	25,96	16,13	4,00
pieces per pallet	1.000	1.430	972
m <sup>2</sup> /m per bundle	0,96	1,36	4,50
m <sup>2</sup> /m per pallet	38,52	88,65	243,00
bundles per pallet	40	65	54
kg per pallet	800	490	573
kg per piece	0,800	0,343	0,590
kg per m <sup>2</sup> /m	20,768	5,533	2,360
kg per bundle	20,000	7,546	10,620
surcharge	❖	❖	❖

★ = Discount on pallets. ● = Normally available ex stock. ○ = Made to order – delivery terms upon request. PG = Price group (please see current price list).  
❖ = Minimum quantity: each open box will incur a surcharge. <sup>1)</sup> = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

\* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Keraplatte® Selected, Keraplatte® Zoë, Keraplatte® Gravel Blend, Keraplatte® Epos, Keraplatte® Aera T, Keraplatte® Aera, Keraplatte® Roccia X, Keraplatte® Roccia, Keraplatte® Asar, Keraplatte® Terra, Keraplatte® Duro, Terrace slab TerioTec® X Profile, Terrace slab TerioTec® X, Terrace Slab TerioTec®, Stalotec®, Brickwerk, Brick 60, Wasserbrand, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.

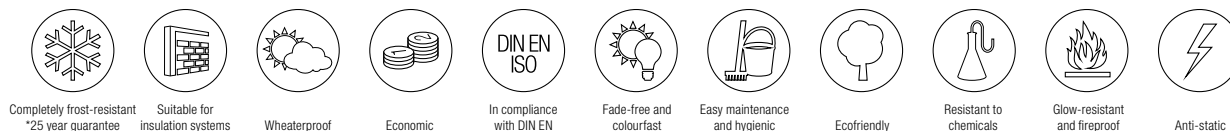

Completely frost-resistant  
\*25 year guarantee

Suitable for  
insulation systems

Weatherproof

Economic

In compliance  
with DIN EN  
ISO

Fade-free and  
colourfast

Easy maintenance  
and hygienic

Ecofriendly

Resistant to  
chemicals

Glow-resistant  
and fireproof

Anti-static