

# KERAVETTE®



AGAINST WIND  
AND WEATHER.  
AND TOO HIGH  
ENERGY COSTS.



**ALSO REGARDING COST-EFFECTIVENESS. UNOBTRUSIVE AND YET STILL IMPRESSIVE.**

Keravette gives a facade a new unmistakable and individual look. No wonder the word “facade” has been adopted from the Italian word “faccia” meaning “face”.

20 beautiful colour tones, numerous formats and surfaces give you a nearly unlimited choice of options. So each facade quite easily becomes unmistakable.

The material thickness of 8 and 11 mm means this classic among clinker brick slips is not only light but, thanks to the especially high firing temperature, it is also extremely robust. Together with modern thermal insulation, they are also hard to resist when it comes to price.

# KERAVETTE®


## UNCOMPLICATED. UNOBTRUSIVE.

### FIRINGS AND FORMATS




**140 white**  
Δ < 6 % · DIN EN 14411, Gr. AI<sub>1</sub>

NF

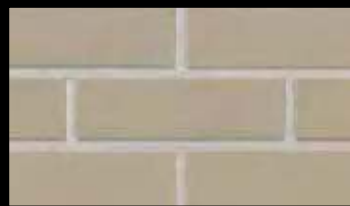

**238 aluminium matt**  
Δ < 6 % · DIN EN 14411, Gr. AI<sub>1</sub>

NF

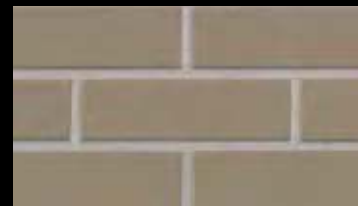

**230 grey**  
Δ < 3 % · DIN EN 14411, Gr. AI<sub>0</sub>

NF



**330 graphite**  
Δ < 6 % · DIN EN 14411, Gr. AI<sub>1</sub>

NF/DF



**320 sand yellow**  
Δ < 6 % · DIN EN 14411, Gr. AI<sub>1</sub>

NF



**215 patrician red**  
Δ < 3 % · DIN EN 14411, Gr. AI<sub>0</sub>

NF/DF



**210 brown**  
Δ < 3 % · DIN EN 14411, Gr. AI<sub>0</sub>

NF



**307 wheat**  
Δ < 3 % · DIN EN 14411, Gr. AI<sub>0</sub>

NF/DF



**336 metallic black**  
Δ < 3 % · DIN EN 14411, Gr. AI<sub>0</sub>

NF



**318 palace**  
Δ < 3 % · DIN EN 14411, Gr. AI<sub>0</sub>

NF



**325 achatblue-flashed**  
Δ < 3 % · DIN EN 14411, Gr. AI<sub>0</sub>

NF



**316 patrician red flashed**  
Δ < 3 % · DIN EN 14411, Gr. AI<sub>0</sub>

NF/DF



## PRODUCT DETAILS

### KERAVETTE®

DIN EN 14411



format no.	7960	2110	2640
description	brick slip with text. struct.	brick slips	corner <sup>1)</sup>
nominal size (cm)	DF	NF	NF
production size (mm)	240 x 52 x 8	240 x 71 x 11	240 x 115 x 71 x 11
<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #8B4513; border-radius: 50%; margin-right: 5px;"></span> 215 patrician red</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #D2691E; border-radius: 50%; margin-right: 5px;"></span> 307 wheat</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #654321; border-radius: 50%; margin-right: 5px;"></span> 316 patrician red flashed</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #2F4F4F; border-radius: 50%; margin-right: 5px;"></span> 330 graphite</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #2E3436; border-radius: 50%; margin-right: 5px;"></span> 336 metallic black</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #4682B4; border-radius: 50%; margin-right: 5px;"></span> 325 achatblue-flashed</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #A52A2A; border-radius: 50%; margin-right: 5px;"></span> 318 palace</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #654321; border-radius: 50%; margin-right: 5px;"></span> 210 brown</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #F5DEB3; border-radius: 50%; margin-right: 5px;"></span> 140 white</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #8B7342; border-radius: 50%; margin-right: 5px;"></span> 230 grey</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #A9A9A9; border-radius: 50%; margin-right: 5px;"></span> 238 aluminium matt</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #DAA520; border-radius: 50%; margin-right: 5px;"></span> 320 sand yellow</li> </ul>	★ PG 25 ●	★ PG 35 ●	★ PG 77 ●
pieces per bundle	34	24	16
pieces per m2/rm incl. joint	67,00	50,00	12,50
pieces per pallet	4.692	2.208	1.040
m2/rm per bundle	0,51	0,48	1,28
m2/rm per pallet	70,03	44,16	83,20
bundles per pallet	138	92	65
kg per pallet	967	877	613
kg per piece	0,206	0,397	0,589
kg per m2/rm	13,802	19,850	7,363
kg per bundle	7,004	9,528	9,424
surcharge	❖	❖	❖

★ = Discount on pallets.  
● = Normally available ex stock.  
PG = Price group (please see current price list).  
○ = Made to order – delivery terms upon request.

❖ = Minimum quantity: each open box will incur a surcharge.

<sup>1)</sup> = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

\* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Keraplatte® Selected, Keraplatte® Zoé, Keraplatte® Gravel Blend, Keraplatte® Epos, Keraplatte® Aera T, Keraplatte® Aera, Keraplatte® Roccia X, Keraplatte® Roccia, Keraplatte® Asar, Keraplatte® Terra, Keraplatte® Duro, Terrace slab TerioTec® X Profile, Terrace slab TerioTec® X, Terrace Slab TerioTec®, Stalotec®, Brickwerk, Brick 60, Wasserbrand, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.



Completely frost-resistant  
\*25 year guarantee



Tunnel kiln fired



Suitable for  
insulation systems



Wheatproof



Economic



In compliance  
with DIN EN



Fade-free and  
colourfast



Easy maintenance  
and hygienic



Ecofriendly



Resistant to  
chemicals



Glow-resistant  
and fireproof



Anti-static

# KERAVETTE®

## UNCOMPLICATED. UNOBTRUSIVE.

### FIRINGS AND FORMATS



**319 royal**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



NF



**837 marmos**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



NF



**835 sandos**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



NF



**839 ferro**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



NF



**834 giallo**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



NF



**841 rosso**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



NF



**825 sherry**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



NF/DF















**840 grigio**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



NF

## PRODUCT DETAILS


### KERAVETTE®

DIN EN 14411				
format no.	8071	7960	2110	2610
description	brick slip with text. struct.	brick slip with text. struct.	brick slips	corner <sup>1)</sup>
nominal size (cm)	NF	DF	NF	NF
production size (mm)	240 x 71 x 8	240 x 52 x 8	240 x 71 x 11	175 x 52 x 71 x 11
<ul style="list-style-type: none"> <li> 834 giallo</li> <li> 840 grigio</li> <li> 835 sandos</li> <li> 837 marmos</li> <li> 839 ferro</li> <li> 841 rosso</li> <li> 319 royal</li> <li> 825 sherry</li> </ul>	<p>★ PG 37 ●</p> <hr/> <p>★ PG 32 ●</p>		<p>★ PG 37 ●</p>	<p>★ PG 76 ●</p>
pieces per bundle	51	34	24	28
pieces per m <sup>2</sup> /m incl. joint	50,00	67,00	50,00	12,50
pieces per pallet	4.131	4.692	2.208	1.680
m <sup>2</sup> /m per bundle	1,02	0,51	0,48	2,24
m <sup>2</sup> /m per pallet	82,62	70,03	44,16	134,40
bundles per pallet	81	138	92	60
kg per pallet	1.239	967	877	603
kg per piece	0,300	0,206	0,397	0,359
kg per m <sup>2</sup> /m	15,000	13,802	19,850	4,488
kg per bundle	15,300	7,004	9,528	10,052
surcharge	❖	❖	❖	❖

★ = Discount on pallets. ● = Normally available ex stock. PG = Price group (please see current price list). ❖ = Minimum quantity: each open box will incur a surcharge.

<sup>1)</sup> = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format. The formats shown are illustrative drawings and are not binding. All information without guarantee.

\* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Keraplatte® Selected, Keraplatte® Zoé, Keraplatte® Gravel Blend, Keraplatte® Epos, Keraplatte® Aera T, Keraplatte® Aera, Keraplatte® Roccia X, Keraplatte® Roccia, Keraplatte® Asar, Keraplatte® Terra, Keraplatte® Duro, Terrace slab TerioTec® X Profile, Terrace slab TerioTec® X, Terrace Slab TerioTec®, Stalotec®, Brickwerk, Brick 60, Wasserbrand, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.



Completely frost-resistant  
\*25 year guarantee

Tunnel kiln fired

Suitable for  
insulation systems

Wheatproof

Economic

In compliance  
with DIN EN

Fade-free and  
colourfast

Easy maintenance  
and hygienic

Ecofriendly

Resistant to  
chemicals

Glow-resistant  
and fireproof

Anti-static